

# Documents of FFP2 Earloop

1. Detail of Package04
2. 2020 (F) - 0376 EN 149-FFP2 without valve CCQS
XingGuang- FFP2 Test Report05-14
3. CE-PC-200331-168-01-9A Xingguang issued Module B15-16
4. CE-PC-200331-168-FPC-A Xingguang issued Module C217-18
5. EU Declaration of Conformity19
6. White list on China Ministry of Commerce Website20
7. OBM application from CCQS, customer got their own CE certifcate-19



### FFP2 PARTICLE FILTERING HALF MASK


**C** € 2834


Model: XGM-95

EN149:2001+A1:2009




## **Product Photos**

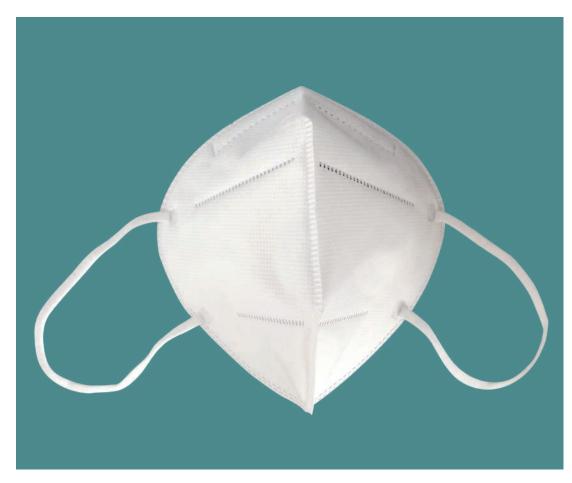

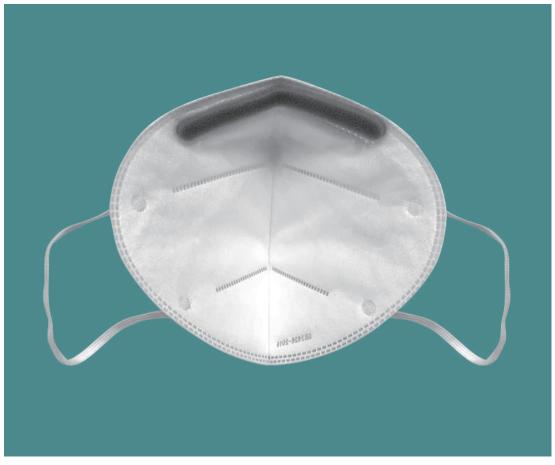

## **Product Photos**



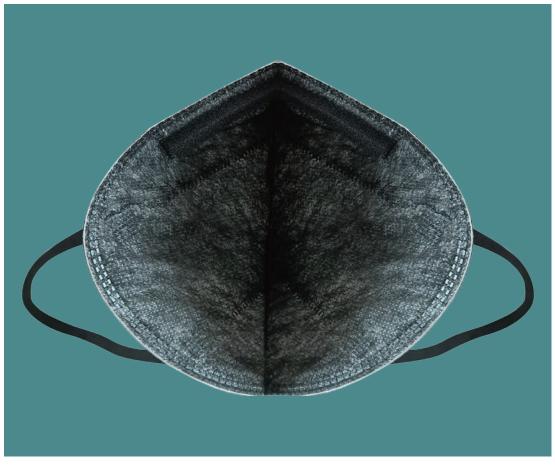



# PACKING MANNER




2pcs/bag\*25



Package Details	Box Details				
2pcs/bag, 25bag in a box,30box per carton	145*124*185mm	G.M 0.42KGS	660*460*390mm	1500pcs	G.W 15KGS





20GP load 230 cartons. 40HQ load 540 cartons.






# PACKING MANNER




2pcs/bag\*25



Package Details	Box Details				
2pcs/bag, 25bag in a box,30box per carton	145*124*185mm	G.M 0.42KGS	660*460*390mm	1500pcs	G.W 15KGS

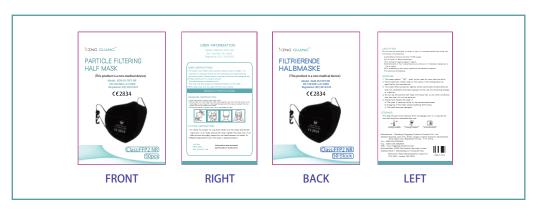



20GP load 230 cartons. 40HQ load 540 cartons.







中国认可 国际互认 检测 TESTING **CNAS L1499** 

National Quality Supervision and Testing Center for Personal Protective Equipment (Beijing) (Testing Laboratory for Labour Protection Products of Beijing Municipal Institute for Labour Protection)

No.55 Taoranting Street, Xicheng District, Beijing, China. Phone: +86 10 63519250 +86 10 63520770 +86 10 83530311

Fax: +86 10 63519250 +86 10 63520770

The Testing Center is accredited for compliance with ISO/IEC 17025. The results of tests, calibrations and/or measurements included in this document are traceable to Chinese/national standards. CNAS is a signatory to the ILAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

#### TEST REPORT

#### Particulate respirator-half facepiece

EN 149: 2001 +A1: 2009 Respiratory protective devices — Filtering half masks to protect against particles — Requirements, testing, marking

**Product:** Particle filtering half mask

Report No: 2020 (F) - 0376

**Client: CCQS Certification Services Limited** 

XGM-95 Model (s):

Date(s) of tests: 2020.07.23-2020.08.23

#### **DESCRIPTION OF SAMPLES**

Classification **Main Components General Information** FFP2 NR White folding mask

Manufacturer Shandong Xingguang Perotective Products Co., Ltd.

Business room 315, Zhilan Village 3, Gaomi Economic Development Zone, Gaomi City, Manufacturer Address

Shandong Province, P. R. China

Signed: 147

陈倬为 Chen Zhuowei Authorized Signatory, Lab Director Issued: 2020.8.24

Page 1 of 10

#### **Conditions:**

The test results presented in this report relate to the samples tested only.

This report may be reproduced and distributed to your clients, provided that it is reproduced and distributed in full.

The authenticity of this test report and its contents can be verified by contacting the laboratory.

#### **Test Results**

7.3 Visual inspection Not tested<sup>1</sup>

The visual inspection shall include the marking and information supplied by the manufacturer. Notel: As requested by the client, marking and information supplied by the manufacturer was not inspected.

7.4 Package Pass<sup>2</sup>

Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.

Note2: In accordance with the requirement.

7.5 Material Pass<sup>3</sup>

Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.

Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.

After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.

When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.

Note3: No mechanical failure after undergoing the conditioning described in 8.3.1. No collapse when conditioned in accordance with 8.3.1 and 8.3.2.

#### 7.6 Cleaning and disinfecting

N/A4

If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer.

Note4: Single shift use only.

#### 7.7 Practical performance

Pass<sup>5</sup>

The particle filtering half mask shall undergo practical performance tests under realistic conditions. **Note5:** No imperfections.

7.8 Finish of parts

Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs. Note6: No sharp edges or burrs.

#### 7.9.1 Total inward leakage

Pass7

Pass<sup>6</sup>

For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3

and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than

22% for FFP1, 8% for FFP2, 2% for FFP3

Note7: FFP2 respirator. Test results are shown in Annex A Table 7.9.1-A&B.

#### 7.9.2 Penetration of filter material

Pass8

The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.

Sodium chloride test 95 l/min

Paraffin oil test 95 l/min

FFP1 ≤20% ≤20%

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

国家劳动保护用品质量监督检验中心(北京)

FFP2 ≤6% ≤6% FFP3 ≤1%

Note8: FFP2 respirator. Test results are shown in Annex A Table 7.9.2.

#### 7.10 Compatibility with skin

Pass9

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

Note9: No irritation or any other adverse effect to health.

7.11 Flammability Pass<sup>10</sup>

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

Note10: Test results are shown in Annex A Table 7.11.

#### 7.12 Carbon dioxide content of the inhalation air

Pass<sup>11</sup>

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume) Note11: Test results are shown in Annex A Table 7.12.

7.13 Head harness Pass<sup>12</sup>

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily. The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

Note12: Head harness can be donned and removed easily, adjustable or self-adjusting and have sufficiently robust to hold the particle filtering half mask firmly.

7.14 Field of vision Pass<sup>13</sup>

The field of vision is acceptable if determined so in practical performance tests.

Note13: Pass the practical performance tests.

7.15 Exhalation valve N/A<sup>14</sup>

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

Note14: No exhalation valve.

#### 7.16 Breathing resistance

Pass15

Classification	Ma	aximum permitted resistance (mba	ar)
	Inhalati	on	Exhalation
	30 l/min	95 1/min	160 l/min
FFP1	0.6	2.1	3.0
FFP2	0.7	2.4	3.0
FFP3	1.0	3.0	3.0

Note15: FFP2 respirator. Test results are shown in Annex A Table 7.16.

Report No: 2020 (F) - 0376 Page 5 of 10

7.17 Clogging N/A<sup>16</sup>

#### 7.17.2 Breathing resistance

Valved particle filtering half masks:

After clogging the inhalation resistances shall not exceed:

FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow

The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow

Valveless particle filtering half masks

After clogging the inhalation and exhalation resistances shall not exceed:

FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

#### 7.17.3 Penetration of filter material

Soc	dium chloride test 95 l/min	Paraffin oil test 95 l/min
FFP1	≤20%	≤20%
FFP2	<b>≤6%</b>	≤6%
FFP3	≤1%	≤1%
Note16: Single	shift use only.	

7.18 Demountable parts

Pass<sup>17</sup>

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand Note17: In accordance with the requirement.

9 Marking Not tested

#### 9.1 Packaging

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

- 9.1.1 The name, trademark or other means of identification of the manufacturer or supplier.
- 9.1.2 Type-identifying marking.
- 9.1.3 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

- **9.1.4** The number and year of publication of this European Standard.
- **9.1.5** At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.
- **9.1.6** The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using the pictogram as shown in Figure 12b.
- **9.1.7** The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.
- **9.1.8** The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.

#### 9.2 Particle filtering half mask

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

9.2.1 The name, trademark or other means of identification of the manufacturer or supplier.

- 9.2.2 Type-identifying marking.
- 9.2.3 The number and year of publication of this European Standard.
- 9.2.4 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

- **9.2.5** If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space
- **9.2.6** Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.

End	of T	<b>Test</b>	Res	ults
-----	------	-------------	-----	------

Report No: 2020 (F) - 0376 Page 7 of 10

#### **Annex A: Summarization of Test Data**

Table 7.9.1-A Inward leakage test data

Test specification: EN 149-2001 Clause 8.5

Subject	Sample No.	Condition	dition Walk(%) Head Head Side/side(%) up/down(%)		Head up/down(%) Talk(%		Walk(%)	Mean(%)			
Yi	1	A.R.	8.42	8.79	8.79	8.79	8.79	8.96	8.76	8.57	8.7
Gong	2	A.R.	5.35	5.84	5.97	5.45	5.77	5.7			
Yu	3	A.R.	5.64	6.10	6.36	6.08	5.77	6.0			
Hu	4	A.R.	5.24	5.37	5.64	5.47	5.24	5.4			
Xu	5	A.R.	6.36	6.82	7.23	6.65	6.43	6.7			
Deng	6	T.C.	6.74	6.85	7.17	7.05	6.82	6.9			
Zhang	7	T.C.	7.43	7.58	7.84	7.57 7.36		7.6			
Zhi	8	T.C.	6.21	6.52	6.63	6.26	6.13	6.3			
Fang	9	T.C.	6.83	7.07	7.36	7.36 7.11		7.1			
Lv	10	T.C.	6.32	6.74	6.89	6.55	6.42	6.6			
All_50 inc	dividual exe	ercise results v	vere not gre	6.74 ater than 11 % s were not greater	TOTAL STATE OF A PROPERTY OF	6.55		ass			

Table 7.9.1-B Facial dimension

Table 7.3.1-B Facial dimension										
Subject	Face length	Face Width	Face Depth	Mouth Width						
Yi 120		130	109	59						
Gong	122	140	115	65						
Yu	'u 119 160		139	55						
Hu	112	122	119	63						
Xu	110	130	118	60						
Deng	eng 115 11		110	59						
Zhang	112	123	113	55						
Liu	103	130	100	50						
Zhi	118	139	130	63						
Fang	115	129	120	50						
Chen	116	150	132	56						
Lv 110 121		110	53							

Report No: 2020 (F) - 0376 Page 8 of 10

Table -7.9.2 Penetration of filter material

Test specification: EN 149-2001 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment	
		11	0.591	9	
	As received	12	0.654		
		13	0.517		
50A6 1003		14	0.763		
	Simulated wearing treatment	15	0.828		
		16	0.786		
chloride test		17	1.13		
	Mechanical strength+ Temperature conditioned	18	1.07		
	र्वे के महाराज्य से जनवाद जी।	19	1.01		
		20	3.17	Pass	
Sodium chloride test  Paraffin oil test	As received	21	3.04		
		22	2.99	6	
Sodium chloride test  M  Paraffin oil test		23	3.25		
	Simulated wearing treatment	24	3.41		
		25	3.36		
		26	3.72		
	Mechanical strength+ Temperature conditioned	27	3.69		
		28	3.81		

**Table 7.11 Flammability** Test specification: EN 149-2001 Clause 8.6

Condition Sample No. Re		Result	Assessment
FM	29	Burn for 1 s	
As received 30	Burn for 1 s		
Temperature	31	Burn for 2 s	Pass
conditioned	32	Burn for 2 s	

Report No: 2020 (F) - 0376 Page 9 of 10

Table 7.12 Carbon dioxide content of the inhalation air

Test specification: EN 149-2001 Clause 8.7

Condition	Sample No.	Result	Result				
	33	0.42%		1			
As received	34	0.40%	Mean value 0.4%	Pass			
	35	0.38%	-				

#### Table 7.16 Breathing resistance (mbar)

Test specification: EN 149-2001 Clause 8.9

	Plan		36						37			38					
As received	Flow rate		Α	В	C	D	Е	Α	В	C	D	Е	Α	В	C	D	E
	7.1.1.12	30 1/min	0.4	0.5	0.4	0.5	0.5	0.5	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	Inhalation	95 1/min	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.3	1.3
	Exhalation	160 l/min	1.9	2.0	1.9	2.0	2,0	2.0	2.0	1.9	2.0	2.0	2.0	2.0	2.0	2.0	2.0
	Fi	0.000.00 <b>4</b> .001			39					40					41		
Simulated	Flow rate		Α	В	С	D	Е	Α	В	С	D	Е	Α	В	C	D	Е
wearing	Inhalation	30 l/min	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.5	0.5	0.4	0.4	0.5	0.4	0.5
treatment		95 l/min	1.3	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.3	1.2	1.3	1.2	1.3
	Exhalation	160 l/min	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9	1.9	1.9	2.0	1.9	2.0	2.0
	TI	224			42					43					44		
TT	Flow	rate	Α	В	C	D	Е	Α	В	С	D	Е	Α	В	C	D	Е
Temperature conditioned	T. L. J. 15	30 1/min	0.5	0.5	0.5	0.4	0.5	0.5	0.5	0.4	0.5	0.5	0.4	0.5	0.4	0.4	0.5
conditioned	Inhalation	95 1/min	1.2	1.3	1.3	1.2	1.2	1.3	1.2	1.3	1.3	1.3	1.3	1.2	1.3	1.3	1.3
	Exhalation	160 l/min	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0	1.9	2.0	2.0	2.0	2.0	1.9	2.0
Assessment				12	Y.,		Pas	S							v		

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side

Test	Uncertainty
Total inward leakage	4.1%
Penetration of filter material	1.1%
Flammability	5.0%
Carbon dioxide content of the inhalation air	2.6%
Breathing resistance	1.8%

End of Annex A

Report No: 2020 (F) - 0376 Page 10 of 10

#### ANNEX B PHOTOS OF SAMPLES







End of Annex B



### Module B EU Type-Examination Certificate

#### For the requirements of PPE Regulation 2016/425

Certificate No.: CE-PC-200331-168-01-9B

Certificate Shandong Xingguang Protective Products Co., Ltd.

holder: Business Room 315, Zhilan Village 3, Gaomi Economic Development

Zone, Gaomi City, Shandong Province, P.R.China

Product: Particle filtering half mask

Detailed product description listed in the Annex

Model(s): XGM-95

Standard(s): EN 149:2001+A1:2009

Respiratory protective devices - Filtering half masks to protect against

particles - Requirements, testing, marking

Issue date: 2020-10-23

Revision date: 2021-02-03

Expiry date: 2021-10-22

The product(s) on this certificate and the Technical File have been assessed and found to be in conformance with the applicable Essential Health and Safety Requirements in Annex II of the PPE regulation 2016/425.

Any changes to the design, manufacturing location or manufacture of the PPE product certified here must be advised to CCQS Certification Services Limited for review.

CE marking shall not be applied until the requirements of all the PPE Regulation 2016/425 and relevant EN Harmonised standards and/or Technical specifications have been met.

If the certified product is Category III then this certificate is only valid if used in conjunction with Conformity Assessment against Module C2 or Module D.

This certificate remains the property of CCQS and maybe withdrawn at any time if it is considered that the equipment is no longer in conformity with the requirements of the PPE Regulation 2016/425.



Approved by Ireland Government as a Notified Body for CE Marking No.2834





#### **CCQS Certification Services Limited**

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland



# Module B EU Type-Examination Certificate Annex

For the requirements of PPE Regulation 2016/425

Certificate No.: CE-PC-200331-168-01-9B

#### Applicable standards and specification:

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

Model reference	el reference Product description		
XGM-95	Folding filtering half mask fitted with ear loops with head harness clip, no valves, internal metal nose clip  Mask body colour: White or Black variant		
	Classification: FFP2 NR Test report No.: 2020(F) - 0376		

Certificate Revision	Revision date	Revision details
Α	2020-10-23	Initial issue
В	2021-02-03	Addition of body colour variant Black



#### **CCQS Certification Services Limited**

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland



# Certificate of Module C2 production monitoring for equipment within the scope of Personal Protective Equipment Regulation (EU) 2016/425 Category III

FPC Certificate No.: CE-PC-200331-168-FPC-A

Certificate holder:

Shandong Xingguang Protective Products Co., Ltd.

Business Room 315, Zhilan Village 3, Gaomi Economic Development

Zone, Gaomi City, Shandong Province, P.R. China

Manufacturing location:

Business Room 315, Zhilan Village 3, Gaemi Economic Development

Zone, Gaomi City, Shandong Province, P.R.China

The scope of the certification for:

The manufacture of respiratory protective device

See annex for articles covered by this certificate

Validity from:

2020-10-23

Revision date:

2020-10-23

To:

2021-10-22



CCQS Certification Services Limited in its role as a Notified Body for PPE Regulation, is monitoring that the manufacturer is producing PPE in conformity with the type described in the EU type-examination certificate and associated technical file and which satisfies the Essential Health and Safety Requirements of the Regulation. The equipment covered by this certificate is listed in the accompanying schedule. This certificate is not complete and has no validity without the accompanying schedule and revision index.

The manufacturer is hereby authorized to affix our Notified Body number, 2834, to each item of PPE mentioned in the schedule which accompanies this certificate whilst this certificate remains valid.

This certificate and the accompanying schedule remain the property of CCQS and maybe withdrawn or revised at any time if CCQS considers that the equipment is no longer in conformity with the requirements of the Regulation.

CE

Approved by Ireland Government as a Notified Body for CE Marking No.2834



Approved by: \* \* \*

Owen Bian Director: 0

CCQS Certification Services Limited

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15,

D15 AKK1, Ireland

Tel: +00 353 1 588 6920 Website: www.ccqs.co.uk E-mail: verify@ccqs.ie If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.

Page 1 of 2 (Fm 220-015, Rev.2)



# Schedule of Module C2 production monitoring for equipment within the scope of Personal Protective Equipment Regulation (EU) 2016/425 Category III

Schedule to CCQS FPC Certificate No.: CE-PC-200331-168-FPC-A

Product reference and description		Reference standard	
Particle Filtering Half Mask   Model	: XGM-95	EN 149:2001+A1:2009	

Certificate Revision	Revision date	Revision details
AL	2020-10-23	Initial issue

This schedule has no validity without the accompanying certificate.

This schedule and the accompanying certificate remain the property of CCQS and maybe withdrawn or revised at any time if CCQS considere that the equipment is no longer in conformity with the requirements of the Regulation.





Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland

Tel: +00 353 1 588 6920 Website: www.ccqs.co.uk E-mail: verify@ccqs.le
If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.



#### **EU Declaration of Conformity**

Annex IX PPE Regulation (EU) 2016/425

#### This EU Declaration of conformity refers to the following products

1. The basic information is as follows:

Product Name	Model	Classification/Type	Batch No./Serial No./Identifier
Particle Filtering half mask	XGM-95	FFP2 NR	

2. The Manufacturer 's name and address is as follows:

Name:	Shandong Xingguang Protective Products Co., Ltd.
Address:	Business room 315, Zhilan village 3, Gaomi Economic Development Zone, Gaomi City, Shandong Province,
	P. R. China


This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.


4. Detailed description of the PPE to allow traceability/identification of the PPE.

Model: XGM-95; Classification/Type: FFP2 NR

Description: White folding half mask without valve









5. The article identified in (4) above is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425.

6. References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:

recinited 35	technical specifications, including the date of the specification, in relation to which contonney is declared.				
No.	Harmonized standard name				
1	EN 149:2001+A1:2009				

7. CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate Number:

No.	EU Type Examination (Module B) Certificate Number
(I)	

8. Product Category:

This product is Category II.

☐ This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

This product is Category III and is subject to Module D Conformity to type based on quality assurance of the production process and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

Signature:

Date: 2070/10/23 Company stamp and/or legal signature

2020/11/18

动态更新: 取得国外标准认证或注册的非医用口罩生产企业清单



English (http://en.cccmhpie.org.cn/) 请输入关键词:

关于商会 → 新闻中心 → 行业服务 →

首页 动态更新:取得国外标准认证或注册的非医用口罩生产企业清单

推荐阅读

2020年11月18日 中国医药保健品进出口商会 分享

取得国外标准认证或注册的非医用口罩生产企业清单 动态更新: 2020年11月17日下载

 序号
 生产企业
 统一社会信用代码
 国外注册认证情况

 1057
 山东星光防护用品有限公司 Shandong Xingguang Protective Products Co.,Ltd
 91370785MA3Q0X8M7T
 欧盟 CE